

NPD16-600-3000

16-Way, 0.6~3GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.6~3GHz
Insertion Loss:	2.2dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	±6°
Impedance:	50Ω
Average Power:	30W max. 2W max. as combiner

Mechanical


Size*1:	113*218*20mm
	4.449*8.583*0.787in
Input Connector:	N Female
Output Connector:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -35~+75°C

Outline Drawings

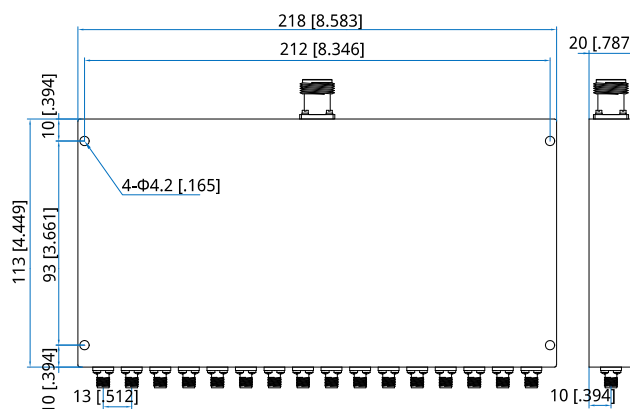

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

NPD16-600-3000

Customization is available upon request.