

NPD16-6000-18000-20-S

16-Way, 6~18GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	6~18GHz
Insertion Loss:	1.8dB max.
Input VSWR:	1.6max.
Output VSWR:	1.5 max.
Isolation:	17dB min.
Amplitude Balance:	±0.8dB
Phase Balance:	±8°
Impedance:	50Ω
Average Power:	20W max. 1W max. as combiner

Mechanical


Size*1:	60*212*10mm 2.362*8.346*0.394in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

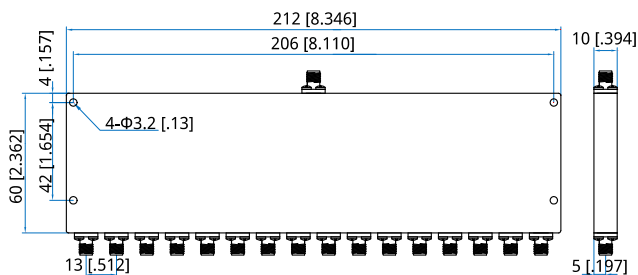

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

NPD16-6000-18000-20-S

Customization is available upon request.