

k2000 - Coaxial Noise Sources

10MHz to 40GHz



Applications Include:

- Radar warning receivers (RWR)
- Built-in test equipment (BITE)
- Military aircraft
- Automotive Radar
- Ultra-low Latency Wireless Backhaul
- 802.11ad High-Speed Wi-Fi

kTB Coaxial Noise Source

The kTB k2000 Coaxial Noise Source embody excellent stability with temperature and voltage. They are well suited for receiver testing, noise figure measurements, and any application requiring broad bandwidth and fast switching time.

Like all kTB noise sources, the k2000 features hermetically sealed noise diodes and each noise source is supplied with calibration data for the full frequency band.


General Specifications


- Noise output rise and fall times Less than 1 μ s
- Noise output variation with temperature Less than 0.01 dB/ $^{\circ}$ C
- Operating temperature -55° to 85° C
- Storage temperature -65° to $+125^{\circ}$ C
- Input power +28 VDC 20 mA typical
- Noise output 14 to 30 dB

Options

- K2M Male connector
- K215 +15V bias

Model	Frequency Range	ENR (dB)	Flatness (dB)	VSWR	DC Bias	RF Connector
K2218A	10MHz to 18GHz	28	± 1.5	x	+28V @20mA (max)	SMA(F)
K2118A	10MHz to 18GHz	15 ± 1.5	x	2:1	+28V @20mA (max)	SMA(F)
K2318A	10MHz to 18GHz	20 to 24	x	x	+28V @20mA (max)	SMA(F)
K2201A	10MHz to 1GHz	30 to 35	± 1	x	+28V @20mA (max)	SMA(F)
K2208B	1GHz to 18GHz	23 to 27	± 1	x	+28V @20mA (max)	SMA(F)
K2240A	2GHz to 40GHz	>20	x	x	+28V @20mA (max)	2.92mm(F)

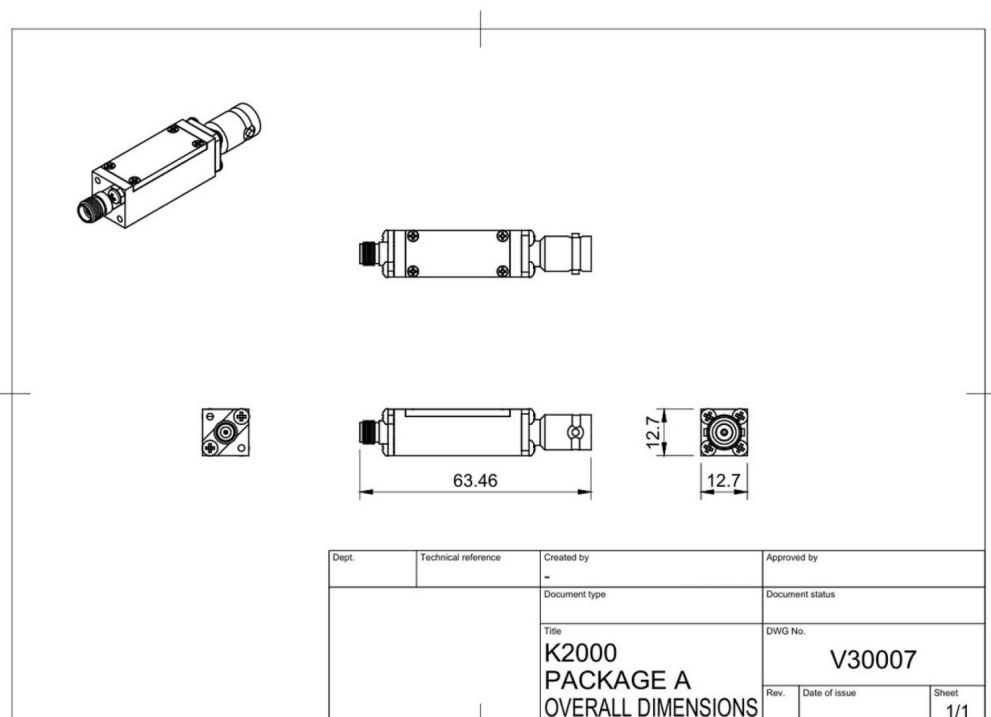

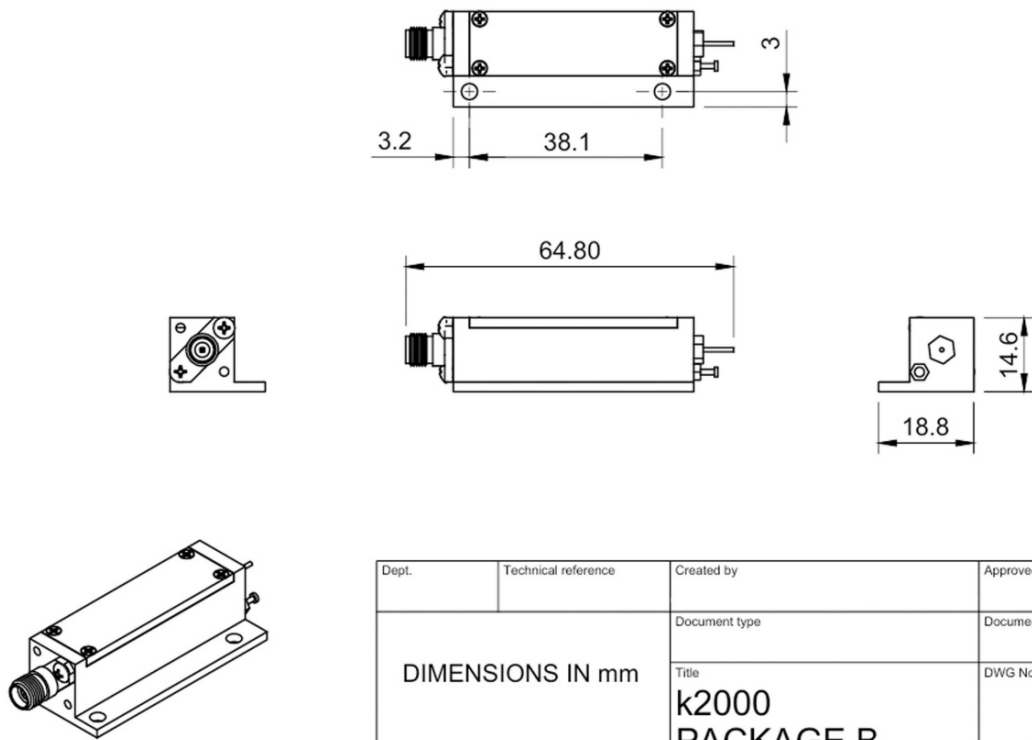

Dept.	Technical reference	Created by	Approved by
DIMENSIONS IN mm		Document type	Document status
		Title	DWG No.
		k2000 PACKAGE B OVERALL DIMENSIONS	V30023
		Rev.	Date of issue
			Sheet
			1/1

k2000 Dimensions

KTBSOLUTIONS INC.

1754 Technology Drive Suite 122
 San Jose CA 95110, USA
 Tel.: +1 (650) 383-0079
 E-mail: sales@ktbsolutions.com
 Web: www.ktbsolutions.com