

k2611 - High ENR Noise Sources

2GHz to 40GHz



Applications Include:

- Radar systems
- High NF device measurements
- Automated test equipment (ATE)

kTB High ENR Noise Sources


The KTB k2611 High ENR Noise Source offers a high ENR output over a wide frequency range.

The k2611 is an excellent choice for applications requiring high ENR, such as ATE, radiometers, and radar systems.

An SMA male connector is standard for the RF output and feedthroughs for bias input. SMA female is an option. Custom frequencies and flatness available. Contact the factory with your request.

General Specifications

| Model | Frequency Range | ENR (dB) | Flatness (dB) | DC Bias | RF Connector |
|-------|-----------------|----------|---------------|------------------|--------------|
| K2611 | 2GHz -40GHz | >30 | ± 2.0 | +15v@100mA (max) | 2.92mm(F) |

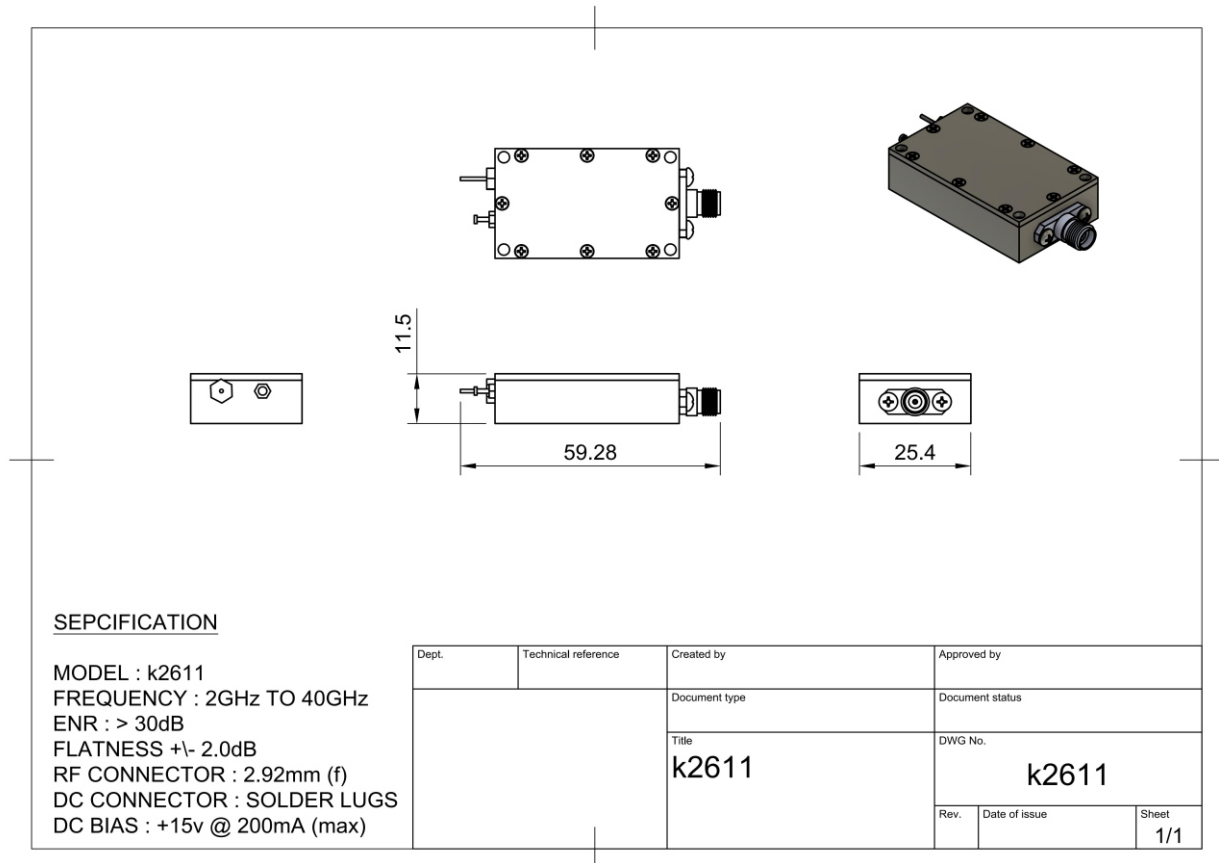

k2611 Dimensions

KTBSOLUTIONS INC.

1754 Technology DR STE 122
 San Jose, CA, 95110, USA
 TeL.: +1 650 686 1019
 E-mail: sales@ktbsolutions.com
 Web: www.ktbsolutions.com