



8-Way Power Divider/Combiner

NPD8-400-6000-30-S

8-Way, 0.4~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.4~6GHz
Insertion Loss:	3.2dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	$\pm 5^\circ$
Impedance:	50 Ω
Average Power:	30W max. 2W max. as combiner

Mechanical


Size ^{*1} :	138*120*12mm 5.433*4.724*0.472in
Weight:	447g
Connectors:	SMA Female
Mounting:	4- Φ 3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

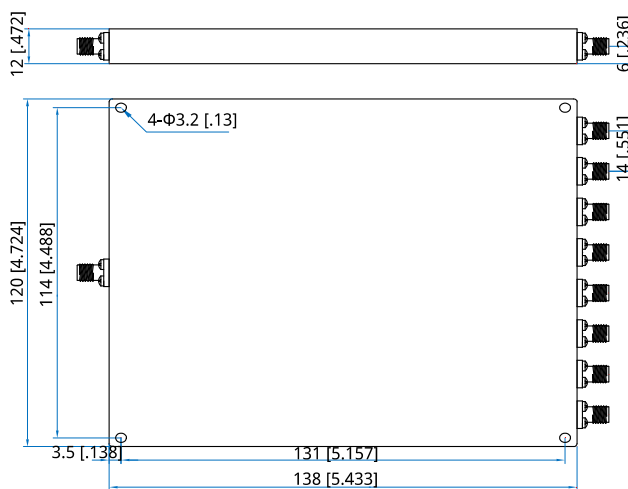

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

NPD8-400-6000-30-S

Customization is available upon request.