



8-Way Power Divider/Combiner

NPD8-80-500-30-S

8-Way, 0.08~0.5GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.08~0.5GHz
Insertion Loss:	1.8dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	18dB min.
Amplitude Balance:	± 0.2 dB
Phase Balance:	$\pm 3^\circ$
Impedance:	50 Ω
Average Power:	30W max. 2W max. as combiner

Mechanical


Size ^{*1} :	202*166*10mm 7.953*6.535*0.394in
Weight:	800g
Connectors:	SMA Female
Mounting:	4- $\Phi 4.4$ mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

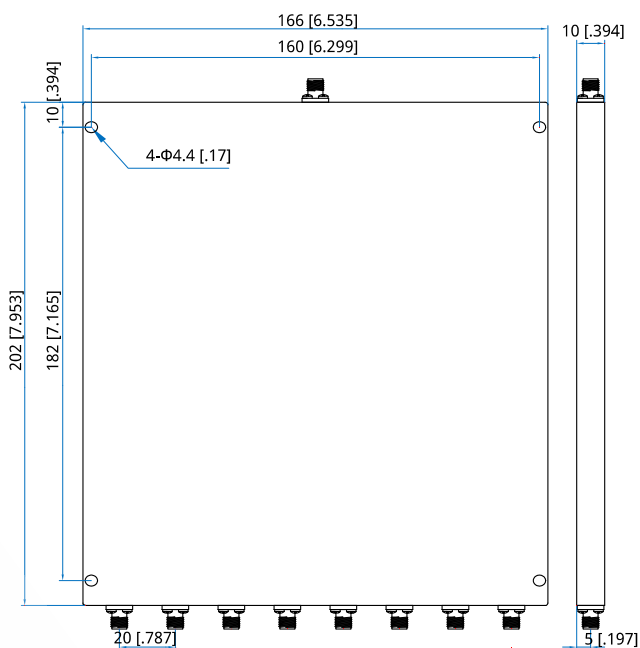

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

NPD8-80-500-30-S

Customization is available upon request.