

## NPD4-0-18000-R5-S

4-Way, DC~18GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical


Frequency:	DC~18GHz
VSWR:	1.8 max.
Insertion Loss:	12±2.8dB
Average Power:	0.5W
Impedance:	50Ω

### Mechanical

Size*1:	54*32*12mm 2.126*1.26*0.472in
Connectors:	SMA Female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

### Outline Drawings

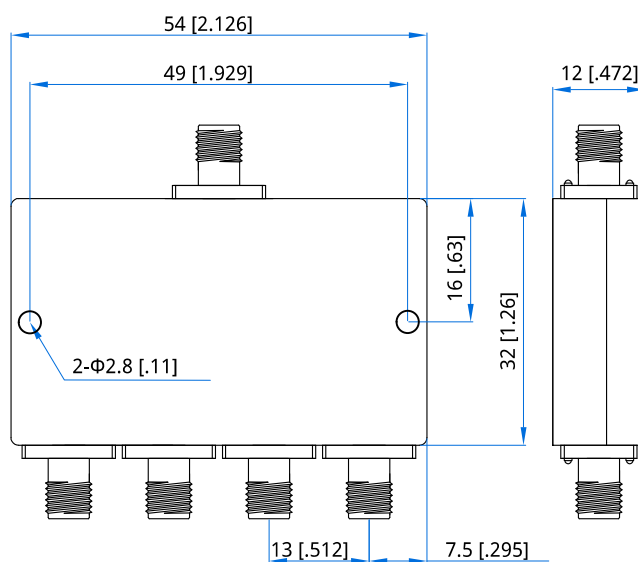

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**NPD4-0-18000-R5-S**

Customization is available upon request.