

NAM2J

NMD 2.4mm to 7mm

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~18GHz
VSWR:	1.15 max.
Impedance:	50Ω


Mechanical

RF Connectors:	NMD 2.4mm 7mm
Mating Life Cycle:	2000 cycles min.
Outer Conductor:	Passivated SUS303 stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

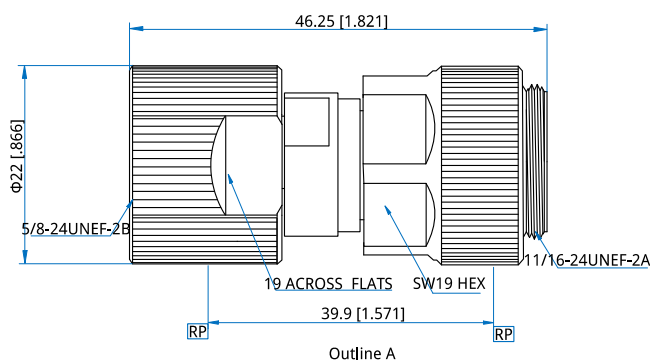

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NAM2J-F - NMD 2.4mm (f) to 7mm, Outline A

Customization is available upon request.