

NAMVMK

NMD 1.85mm to NMD 2.92mm

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~40GHz
VSWR:	1.2 max.
Impedance:	50Ω


Mechanical

RF Connectors:	NMD 1.85mm NMD 2.92mm
Mating Life Cycle:	2000 cycles max.
Outer Conductor:	Passivated SUS303 stainless steel
Dielectric:	PEEK
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

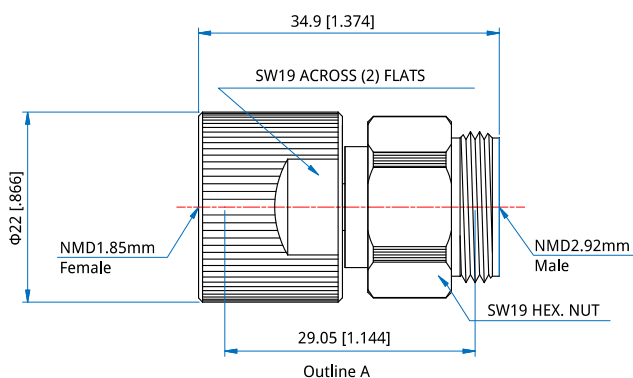

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NAMVMK-FM - NMD 1.85mm(f) to NMD 2.92mm(m), Outline A

Customization is available upon request.